


SL型

シース径 φ6.25 ~ 10.0 100V用

SL型は、ガラス繊維被覆ニッケル燃線リードをヒーター内部で接続したものです。

WD : 発熱部表面容量密度 (W/cm²)

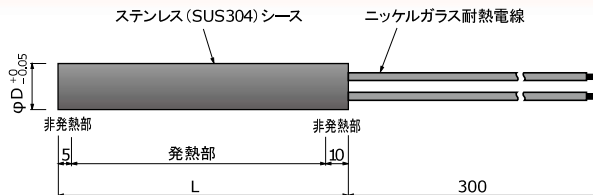

100V用

在庫	型番	商品コード	寸法 (mm)		容量 (W)	WD
			D	L		
	SLA1101	03104720	6.25 (1/4インチ) 電線断面積 0.5mm ²	55	100	13
	SLA1102	03104730		85	100	7.3
	SLA1152	03104740			150	11
	SLA1103	03104750		105	100	5.7
	SLA1203	03104760			200	11
◎	SLB1101	03104020		6.5 電線断面積 0.5mm ²	55	100
◎	SLB1102	03104030	85		100	7.0
◎	SLB1152	03104040			150	10
◎	SLB1103	03104050	105		100	5.4
◎	SLB1203	03104060			200	11
◎	SLC1101	03104110	8.0 電線断面積 0.75mm ²		55	100
◎	SLC1151	03104120		150		15
◎	SLC1102	03104130		85	100	5.7
◎	SLC1202	03104140			200	11
◎	SLC1153	03104150		105	150	6.6
◎	SLC1253	03104160			250	11
◎	SLC1204	03104170		135	200	6.6
◎	SLC1304	03104180			300	9.9

在庫	型番	商品コード	寸法 (mm)		容量 (W)	WD	
			D	L			
	SLD1101	03104810	9.42 (3/8インチ) 電線断面積 0.75mm ²	55	100	8.4	
	SLD1201	03104820			200	17	
	SLD1152	03104830			150	7.2	
	SLD1252	03104840		85	250	12	
	SLD1203	03104850			200	7.5	
	SLD1303	03104860		105	300	11	
	SLD1204	03104870			200	5.6	
	SLD1404	03104880			400	11	
	SLD1305	03104890		155	300	7.2	
	SLD1505	03104900			500	12	
◎	SLE1101	03104210		10.0 電線断面積 0.75mm ²	55	100	8.0
◎	SLE1201	03104220				200	16
◎	SLE1152	03104230	85		150	6.8	
◎	SLE1252	03104240			250	11	
◎	SLE1203	03104250	105		200	7.1	
◎	SLE1303	03104260			300	11	
◎	SLE1204	03104270			200	5.3	
◎	SLE1404	03104280	135		400	11	
◎	SLE1305	03104290			300	6.8	
◎	SLE1505	03104300	500		11		

SL型

シース径 φ12.0 ~ 14.0
シース径 φ6.25 ~ 14.0

100V 用
単相 200V 用

WD : 発熱部表面容量密度 (W/cm²)

100V 用

在庫	型番	商品コード	寸法 (mm)		容量	WD
			D	L		
◎	SLF1101	03104310	12.0 電線断面積 1.25 mm ²	55	100	6.6
◎	SLF1201	03104320			200	13
◎	SLF1202	03104330		85	200	7.6
◎	SLF1302	03104340			300	11
◎	SLF1253	03104350		105	250	7.4
◎	SLF1403	03104360			400	12
◎	SLF1304	03104370		135	300	6.6
◎	SLF1504	03104380			500	11
◎	SLF1405	03104390		155	400	7.6
◎	SLF1605	03104400			600	11
◎	SLF1506	03104410	195	500	7.4	
◎	SLF1806	03104420		800	12	
	SLG1101	03104910	12.6 (1/4 インチ) 電線断面積 1.25 mm ²	55	100	6.3
	SLG1201	03104920			200	13
	SLG1202	03104930		85	200	7.2
	SLG1302	03104940			300	11
	SLG1253	03104950		105	250	7.0
	SLG1403	03104960			400	11

在庫	型番	商品コード	寸法 (mm)		容量	WD
			D	L		
	SLG1304	03104970	12.6 (1/2 インチ) 電線断面積 1.25 mm ²	135	300	6.3
	SLG1504	03104980			500	11
	SLG1405	03104990		155	400	7.2
	SLG1605	03104991			600	11
	SLG1506	03104992		195	500	7.0
	SLG1806	03104993			800	11
	SLH1101	03104510	14.0 電線断面積 1.25 mm ²	55	100	5.7
	SLH1201	03104520			200	11
	SLH1202	03104530		85	200	6.5
	SLH1302	03104540			300	9.7
	SLH1253	03104550		105	250	6.3
	SLH1453	03104560			450	11
	SLH1354	03104570		135	350	6.6
	SLH1554	03104580			550	10
	SLH1405	03104590		155	400	6.5
	SLH1705	03104600			700	11
	SLH1556	03104610		195	550	6.9
	SLH1906	03104620			900	11

単相 200V 用

在庫	型番	商品コード	寸法 (mm)		容量 (W)	WD	
			D	L			
	SLA2101	03105720	6.25 (1/4 インチ) 電線断面積 0.5 mm ²	55	100	13	
	SLA2102	03105730		85	100	7.3	
	SLA2152	03105740		105	150	11	
	SLA2103	03105750			100	5.7	
	SLA2203	03105760		200	11		
◎	SLB2101	03105020	6.5 電線断面積 0.5 mm ²	55	100	12	
◎	SLB2102	03105030		85	100	7	
◎	SLB2152	03105040			150	10	
◎	SLB2103	03105050		105	100	5.4	
◎	SLB2203	03105060			200	11	
◎	SLC2101	03105110	8.0 電線断面積 0.75 mm ²	55	100	9.9	
◎	SLC2151	03105120			150	15	
◎	SLC2102	03105130		85	100	5.7	
◎	SLC2202	03105140			200	11	
◎	SLC2153	03105150		105	150	6.6	
◎	SLC2253	03105160			250	11	
◎	SLC2204	03105170		135	200	6.6	
◎	SLC2304	03105180			300	9.9	
	SLD2101	03105810		9.42 (3/8 インチ) 電線断面積 0.75 mm ²	55	100	8.4
	SLD2201	03105820				200	17
	SLD2152	03105830	85		150	7.2	
	SLD2252	03105840			250	12	
	SLD2203	03105850	105		200	7.5	
	SLD2303	03105860			300	11	
	SLD2204	03105870	135		200	5.6	
	SLD2404	03105880			400	11	
	SLD2305	03105890	155		300	7.2	
	SLD2505	03105900			500	12	
◎	SLE2101	03105210	10.0 電線断面積 0.75 mm ²		55	100	8
◎	SLE2201	03105220				200	16
◎	SLE2152	03105230		85	150	6.8	
◎	SLE2252	03105240			250	11	
◎	SLE2203	03105250		105	200	7.1	
◎	SLE2303	03105260			300	11	
◎	SLE2204	03105270		135	200	5.3	
◎	SLE2404	03105280			400	11	
◎	SLE2305	03105290		155	300	6.8	
◎	SLE2505	03105300			500	11	

在庫	型番	商品コード	寸法 (mm)		容量 (W)	WD	
			D	L			
◎	SLF2101	03105310	12.0 電線断面積 1.25 mm ²	55	100	6.6	
◎	SLF2201	03105320			200	13	
◎	SLF2202	03105330		85	200	7.6	
◎	SLF2302	03105340			300	11	
◎	SLF2253	03105350		105	250	7.4	
◎	SLF2403	03105360			400	12	
◎	SLF2304	03105370		135	300	6.6	
◎	SLF2504	03105380			500	11	
◎	SLF2405	03105390		155	400	7.6	
◎	SLF2605	03105400			600	11	
◎	SLF2506	03105410		195	500	7.4	
◎	SLF2806	03105420			800	12	
	SLG2101	03105910		12.6 (1/2 インチ) 電線断面積 1.25 mm ²	55	100	6.3
	SLG2201	03105920				200	13
	SLG2202	03105930			85	200	7.2
	SLG2302	03105940				300	11
	SLG2253	03105950			105	250	7
	SLG2403	03105960				400	11
	SLG2304	03105970	135		300	6.3	
	SLG2504	03105980			500	11	
	SLG2405	03105990	155		400	7.2	
	SLG2605	03105991			600	11	
	SLG2506	03105992	195		500	7	
	SLG2806	03105993			800	11	
	SLH2101	03105510	14.0 電線断面積 1.25 mm ²		55	100	5.7
	SLH2201	03105520				200	11
	SLH2202	03105530			85	200	6.5
	SLH2302	03105540				300	9.7
	SLH2253	03105550			105	250	6.3
	SLH2453	03105560				450	11
	SLH2354	03105570		135	350	6.6	
	SLH2554	03105580			550	10	
	SLH2405	03105590		155	400	6.5	
	SLH2705	03105600			700	11	
	SLH2556	03105610		195	550	6.9	
	SLH2906	03105620			900	11	